
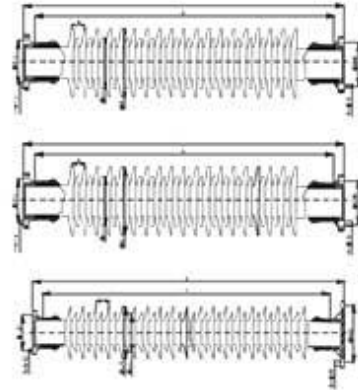


110kV (126kV、132kV) 支柱复合绝缘子 110kV(126kV、132kV) Post Composite Insulator

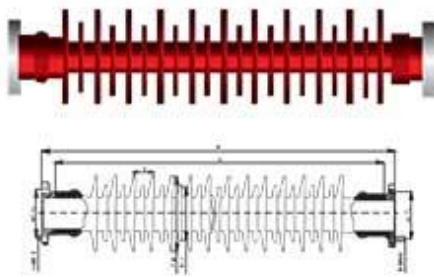

110kV(126kV、132kV) 支柱复合绝缘子示意图
110kV(126kV、132kV) Post Composite Insulator Diagram

110kV(126kV、132kV) 支柱复合绝缘子主要尺寸与特性

Main Dimension and Characteristics of 110kV(126kV、132kV) Post Composite Insulator

Serial Number 序号	Type of Insulator 绝缘子型号	Specified Voltage 额定电压	Specified Bending Withstand Load 额定弯矩	Section Length 绝缘子长度	Min. Arcing Distance 最小爬电距离	Big Shed Diameter 大伞直径	Min Nominal Creepage Distance 最小公称爬电距离	Lightning Impulse Withstand Voltage(Peak Value) 雷电冲击耐受电压(峰值)	Power Frequency Withstand Voltage Min. Value(RMS) 工频耐受电压(有效值)	Reference Weight 参考重量
		kV	kN	H mm	h mm	d1 mm	L mm	> kV	> kV	kg
1	FZSW-110(126)/132	8/10/12	4.5	1500±5	1330	210	4500	650	276	33.4
2	FZSW-110(126)/132	8/10	8	1220±5	1000	182	3200	550	230	25

说明：产品的尺寸、特性、连接方式和伞裙颜色等可按照客户具体要求设计、生产

Note: Product's dimension, characteristics, connecting type, shed color, etc can be designed and manufactured in accordance with customer's requirements.