


66kV (72.5kV) 支柱复合绝缘子 66kV (72.5kV) Post Composite Insulator

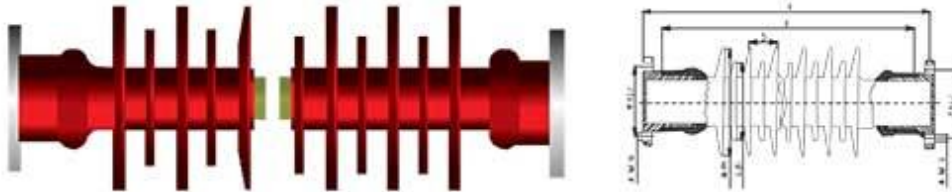

66kV(72.5kV) 支柱复合绝缘子示意图
66kV(72.5kV) Post Composite Insulator Diagram

66kV(72.5kV) 支柱复合绝缘子主要尺寸与特性

Main Dimensions and Characteristics of 66kV (72.5kV) Post Composite Insulator

Serial Number 序号	Type of Insulator 绝缘子型号	Specific Voltage 额定电压	Spec. and Breaking Withstand Load 额定电压耐受电压	Section Length 绝缘子长度	Min. Arcing Distance 最小爬电距离	Big Shed Diameter 大伞直径	Min. Nominal Creepage Distance 最小公称爬电距离	Lighting Impulse Withstand Voltage(Peak Value) 雷电冲击耐受电压(峰值)	Power Frequency Withstand Voltage Min. Weir(RMS) 工频(交流)耐受电压(有效值)	Preference Weight 额定重量
		kV	kN	H mm	h mm	d1 mm	L mm	W kV	W kV	kg
1	FZSW-66(72.5)/10	66/72.5	10	760±5	600	212	2250	325	140	18.4

说明：产品的尺寸、特性、连接方式和伞裙颜色等可按照客户具体要求设计、生产

Note: Product's dimension, characteristics, connecting type, shed color, etc can be designed and manufactured in accordance with customer's requirements.