


悬式复合绝缘子 Composite Suspension Insulator

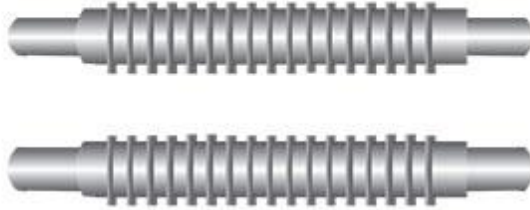

悬式复合绝缘子主要尺寸与特性

Main dimension and Characteristics of Composite Suspension Insulator

序号 Serial Number	产品型号 Product Type	额定电压 Specified Voltage	额定机械负荷 Specified Mechanical Load 额定机械负荷峰值系数 Specified Mechanical Load Peak Value Coefficient	额定机械负荷 Specified Mechanical Load	伞裙长度 Section Length	最小绝缘距离 Min Insulation Distance	最小爬电距离 Min Creepage Distance	雷电冲击耐受电压(峰值) 雷电冲击耐受电压峰值 Lightning Impulse Withstand Voltage (Peak Value)	工频耐受电压 Power Frequency/Withstand Voltage Test - Wet
		kV	kN	kN	H mm	h mm	L mm	kV	kV
1	FXB-1.5/40-Φ28	1.5	40	/	290±5	190	250	125	30
2	FXB-1.5/40-Φ34	1.5	40	/	290±5	190	250	125	30

说明：产品的尺寸、特性、连接方式和伞裙颜色等可按照客户具体要求设计、生产

Note: Product's dimension, characteristics, connecting type, shed color, etc can be designed and manufactured in accordance with customer's requirements.